

MITYLITE[®]

PORTABLE DANCE FLOOR

MAGNATTACH[®]



The best portable dance floor on the market just got better. With more color options, a stronger laminate finish that is 2X more scratch resistant, and panels that are even lighter and easier to use, **Magnattach®** is unrivaled by the competition.

PRODUCT FEATURES


- 1** Fastest assembly and disassembly in the industry—less than 7 minutes!
- 2** Lowest cost of ownership & operation in the industry
- 3** Holds securely with patented triple-lock system eliminating risk of injury and liability
- 4** Self-locking design means no moving parts or need for screws, cams, and tabs
- 5** Wilsonart® laminate finish now 2X more scratch resistant in a wide variety of colors
- 6** Low maintenance care with zero need for refinishing

NEW DESIGN
THINNER, LIGHTER
& EASIER TO HANDLE
THAN EVER BEFORE!




SURFACE FINISH OPTIONS


STANDARD FINISHES

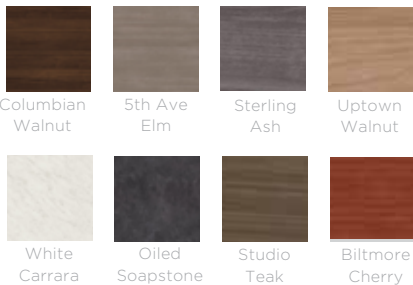

OPTIONAL FINISHES **

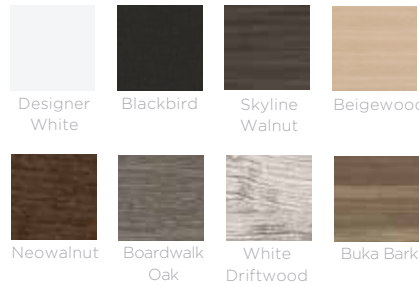

EDGE RAMP FINISH OPTIONS

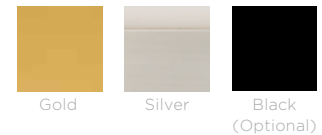

** Optional Laminates: Minimum Order Quantity & Upcharges will apply. Contact your sales rep for details

SURFACE

Constructed of .10" [.25 cm] thick Wilsonart® low-maintenance laminate. Bonding to frame & substrate is achieved via a neoprene-based, two part activated adhesive & a high-strength, flexible polymer adhesive.

FRAME

Constructed from aircraft grade 6063-T5 tempered aluminum. Smooth strong welds are achieved via a special Helium MIG welding process. The aluminum lip encases & protects dance surface corners and sides and provides a smooth transition from panel to panel.

EDGE & CORNER RAMPS

Made of 6063-T5 tempered aluminum. Each corner utilizes a large 'L box' gusset weld for superior strength. A low 11° slope makes floor entry and exit smooth and easy. Each edge spans two adjacent panels for a secure vice-like lock with no chance for panel separation.



SUBSTRATE CORE

Lightweight, high-strength structural foam is sandwiched between multiple layers of high-pressure compact laminate top & bottom surfaces.



MAGNETS

Each panel houses 60 Neodymium type 30 permanent magnets. This provides over 400 lbs of self-locking and holding power per panel. All magnets are nickel-plated and have a chamfered edge.



LOCKING BARS

Permanent, steel locking bars are located within the frame sub channel and are made of hardened, cold rolled, zinc plated steel.



CART

- Holds up to 26 dance floor panels (416 sq ft [38.6 sq meters]); equivalent to a 16'x24' floor
- Contains all required edging (16 straight edge pieces and 4 corners)
- Occupies only 12.5 sq ft of your valuable storage space.

SPECIFICATIONS

PANEL THICKNESS	PANEL DIMENSIONS	PANEL WEIGHT	PANEL SQ FT	WEIGHT/SQFT	EDGE RAMP SLOPE
.79" (2cm)	4' x4' (1.2mx1.2m)	41 lbs (18.6 kg)	16	2.56 lbs	11°





SUSTAINABILITY

Truly sustainable products are those that not only minimize environmental impact, but also perform their function for an extended period of time. From the beginning, MityLite has utilized leading edge design techniques & quality materials that maximize product life span to minimize post-consumer waste.

WARRANTY

Magnattach® portable dance floor frame and sub assemblies, floor substrate, magnets and aluminum edges and corners are warranted to be free from manufacturer defects in materials and workmanship under normal use, service, and handling for a period of five [5] years from the date of purchase. Magnattach® portable dance floor surface is warranted to be free from manufacturer defects in materials and workmanship under normal use, service, and handling for a period of five [5] years from the date of purchase.

In the case of customers determined to be rental companies, the customer's warranty will exist for one (1) year.

NOTE: Subfloors used under Magnattach® installations must conform to ASTM and/or ACI standards for flooring flatness. During normal use and handling, Magnattach® portable dance floors will not interfere with electronics, medical devices, credit cards or hotel room keys.